


MARMOBRICK HAMMERED 410x100x18

units: mm

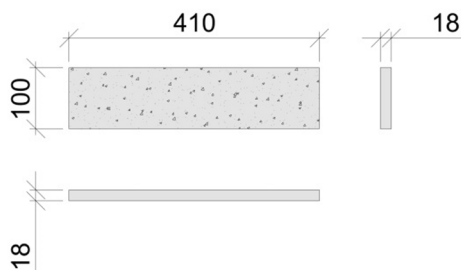

Piece Dimensions

Photography of the Piece



MARMOBRICK MB GR403

Colors Available		GR 401		GR 424		Technical Specifications		
Product characteristics and package		GR 403		GR 425		Product Classification	EN 14618	Concrete Coating
		GR 405		GR 426		Surface Quality	EN 14617-16	Visual Inspection
Product Type	Flat Elements	GR 408		GR 427		Dimensions and Geometry	EN 14617-16	Tolerances ± 5 mm
sqm/pallet	35,42 m ²	GR 410		GR 428		Maximum Water Absorption	EN 14617-1	≤ 6 %
sqm/box	0,492 m ²	GR 411		GR 429		Average Apparent Density	EN 14617-1	2200 ± 50 kg/m ³
Items/sqm	24,4 units	GR 413		GR 430		Freeze/Thaw Resistance Flexural Strength (after 25 cycles)	EN 14617-5 EN 14617-2	Pass No Change
Items/box	12 units	GR 415		GR 432		Thermal Shock Resistance Flexural Strength (after 20 cycles)	EN 14617-6 EN 14617-2	Pass No Change
Box/pallet	72 units	GR 417		GR 433		Minimum Flexural Strength	EN 14617-2	7 MPa
weight/box	18 kg	GR 418		GR 434		Compressive Strength Class Minimum Compressive Strength	EN 206 EN 12390-3	C30/37 ≥ 37 N/mm ²
weight/pallet	1320 kg	GR 422		GR 435		Water Absorption by Capillary	EN 772-11	≤ 1 g/(m ² .s)
Approved	Elaborate	GR 423		GR 436		Ref. ^a PTDS MAR_001	Date 31-01-2018	