


MARMOBRICK POLISHED 410x100x18

units: mm

Photography of the Piece

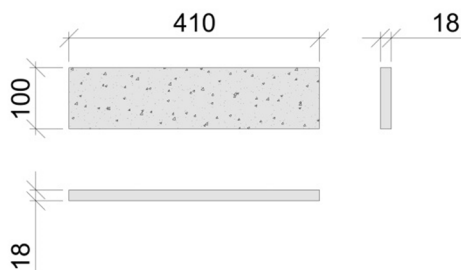

Piece Dimensions



MARMOBRICK MB S405 / S417

Colors Available		S401		S425		Technical Specifications		
Product characteristics and package		S403		S426		Product Classification	EN 14618	Concrete Coating
		S405		S427		Surface Quality	EN 14617-16	Visual Inspection
		S408		S428		Dimensions and Geometry	EN 14617-16	Tolerances ± 5 mm
Product Type	Flat Elements	S410		S429		Maximum Water Absorption	EN 14617-1	≤ 6 %
sqm/pallet	35,42 m ²	S411		S430		Average Apparent Density	EN 14617-1	2200 ± 50 kg/m ³
sqm/box	0,492 m ²	S413		S432		Freeze/Thaw Resistance Flexural Strength (after 25 cycles)	EN 14617-5 EN 14617-2	Pass No Change
Items/sqm	24,4 units	S415		S433		Thermal Shock Resistance Flexural Strength (after 20 cycles)	EN 14617-6 EN 14617-2	Pass No Change
Items/box	12 units	S417		S434		Minimum Flexural Strength	EN 14617-2	7 MPa
Box/pallet	72 units	S422		S435		Compressive Strength Class Minimum Compressive Strength	EN 206 EN 12390-3	C30/37 ≥ 37 N/mm ²
weight/box	18 kg	S423		S436		Water Absorption by Capillary	EN 772-11	≤ 1 g/(m ² .s)
weight/pallet	1320 kg	S424		-		Ref. ^a PTDS MAR_001	Date 31-01-2018	
Approved Vitor Silva	Elaborate Bruno Veloso							