
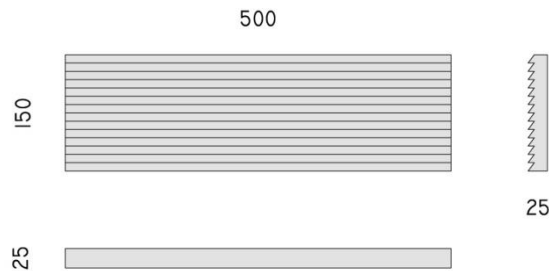


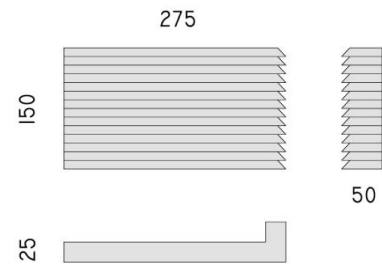

RISCADO Flat Elements 500 x 150 x 25 | Corners 275 x 150 x 50 x 25_ mod. 840

Units: mm

Thickness $\approx$ 25 mm
Piece Dimensions - Flat ElementsThickness $\approx$ 25 mm
Piece Dimensions - Corners

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.

Available Colors



* The Natural wall coverings presents variations in the surface of each piece, as well as between different pieces. No natural wall covering is the same as another, just as it is not the same as the sample. The concrete surface may also have several surface voids caused by air bubbles. These are natural properties of concrete.



Technical Specifications

Product characteristics and package			Product Classification	EN 14618	Concrete Coating
Product Type	Flat Elements	Corners	Surface Quality	EN 14617-16	Visual Inspection
Quantity per Pallet	36 sqm	72 lm	Dimensions and Geometry	EN 14617-16	Tolerances $\pm$ 5 mm
Quantity per Box	0,60 sqm	1,20 lm	Maximum Water Absorption	EN 14617-1	$\leq$ 10 %
Items/sqm	12,5 Units	7 Units	Average Apparent Density	EN 14617-1	1700 $\pm$ 50kg/m ³
Items/Box	8 Units	8 Units 4 right / 4 Left	Freeze/Thaw Resistance Flexural Strength (after 25 cycles)	EN 14617-5 EN 14617-2	Pass No change
Boxes/Pallet	60 Boxes	60 caixas	Thermal Shock Resistance Flexural Strength (after 20 cycles)	EN 14617-6 EN 14617-2	Pass No change
Average weight/sqm	31,6 kg	10,8 kg	Minimum Flexural Strength	EN 14617-2	6 MPa
Average weight/Box	19 kg	13 kg	Compressive Strength Class Minimum Compressive Strength	EN 206 EN 12390-3	LC30/33 $\geq$ 33 N/mm ²
Average weight/Pallet	1170 kg With Pallet	810 kg With Pallet	Water Absorption by Capillary	EN 772-11	$\leq$ 1 g/(m ² .s)
Approved: Vitor Silva	Elaborate: Bruno Veloso	PTDS n°: RIS_001_EN	Date: 24/09/2021		