


STONE CORK 300 x 100 x 15/20/25 | 200 x 100 x 15/20/25 | 100 x 100 x 15/20/25

units: mm

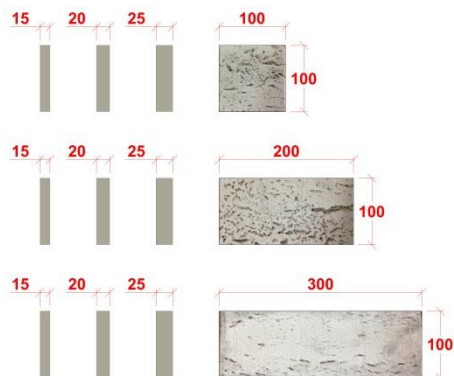

Thickness $\approx$ 15/20/25 mm

Piece Dimensions

Piece photo



Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.



STONE CORK SC35

Product characteristics and package

Technical Specifications

Colors Available	SC 11	SC 33	SC 34	SC 35	Product Classification	EN 14618	Concrete Coating
Product Type	Flat Elements				Surface Quality	EN 14617-16	Visual Inspection
Quantity per Pallet	34,02 sqm				Dimensions and Geometry	EN 14617-16	Tolerances $\pm$ 5 mm
Quantity per Box	0,54 sqm				Maximum Water Absorption	EN 14617-1	$\leq$ 10 %
Items/sqm	50 Units				Average Apparent Density	EN 14617-1	1700 $\pm$ 50kg/m ³
Items/Box	27 Units				Freeze/Thaw Resistance Flexural Strength (after 25 cycles)	EN 14617-5 EN 14617-2	Pass No change
Boxes/Pallet	63 Boxes				Thermal Shock Resistance Flexural Strength (after 20 cycles)	EN 14617-6 EN 14617-2	Pass No change
Average weight/sqm	30 kg				Minimum Flexural Strength	EN 14617-2	6 MPa
Average weight/Box	16,20 kg				Compressive Strength Class Minimum Compressive Strength	EN 206 EN 12390-3	LC30/33 $\geq$ 33 N/mm ²
Average weight/Pallet	1050 kg With pallet				Water Absorption by Capillary	EN 772-11	$\leq$ 1 g/(m ² .s)
Approved: Vitor Silva	Elaborate: Bruno Veloso				PTDS n°: STO_001_EN	Date: 12-07-2021	